

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number
WO 2005/085694 A1

(51) International Patent Classification⁷: **F16L 15/00**,
15/02, 15/04, 15/08, 27/12, 27/08, 27/087, 25/12, 55/07,
55/00

(21) International Application Number:
PCT/AU2005/000331

(22) International Filing Date: 9 March 2005 (09.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004901174 9 March 2004 (09.03.2004) AU

(71) Applicant (for all designated States except US): **TIN-
GLEWOOD TECHNOLOGIES PTY LTD** [AU/AU];
116 McPherson Drive, Nornalup, W.A. 6333 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HALL, Derek, Shane**
[AU/AU]; 116 McPherson Drive, Nornalup, W.A. 6333
(AU).

(74) Agent: **WRAY & ASSOCIATES**; Level 4, The Quadrant,
1 William Street, Perth, W.A. 6000 (AU).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: PIPE INSERT

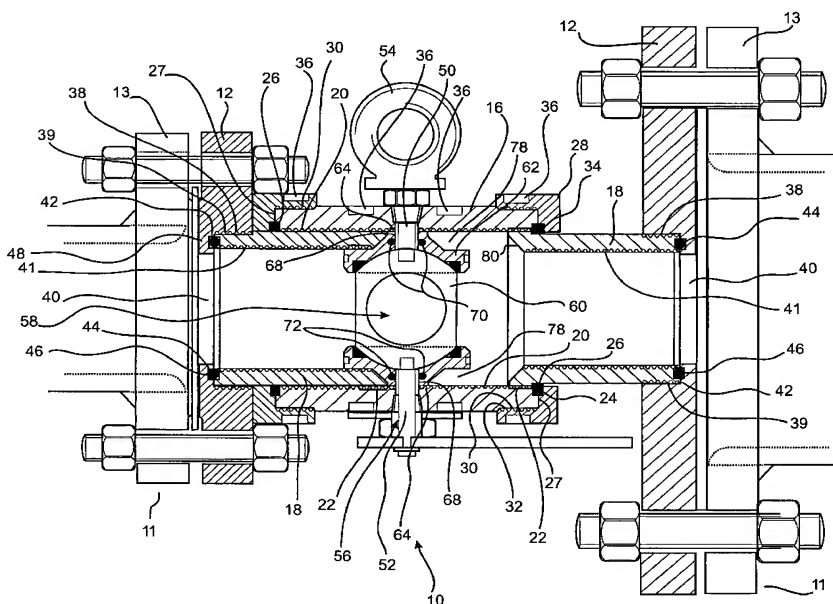

(57) Abstract: A pipe insert (10) which in use is to provide a connection between spaced pipe ends (11), the insert having at least two ends, the pipe insert being adjustable to be able to vary the relative displacement between the ends, each end having connecting means (12) adapted to provide a sealing interconnection between that end and the respective pipe end. A method of connecting at least two pipe ends is also claimed.

WO 2005/085694 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.